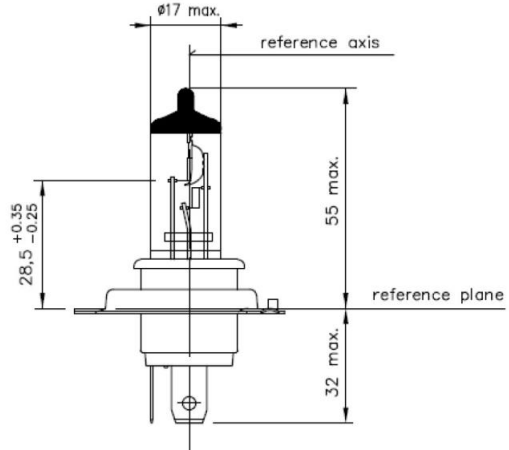


GENERAL

	H4 12V 60W/55W P43t	Features	original equipment manufacturer quality, black top color, hardglass, UV-cut
	Ordering Number 28881	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V
	Rated Wattage	max. 75W/68W @13,2V
Geometry Light center length: 28,5mm +0,35mm/-0,25mm Bulb diameter: max. 17mm	Base	P43t
	Operating Conditions	burning position: horizontal
	Luminous Flux	1650/1000 lm ± 15% @13,2V
	Lifetime	B3: 240/400h @13,2V Tc: 500/900h @13,2V

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 4/12/2017

replace for 07.05.2014-V2-PN14/0233

file 28881 - H4 12V 60W/55W P43t.100

Disclaimer:
Subject to change without notice. Errors and omission accepted.
Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com