
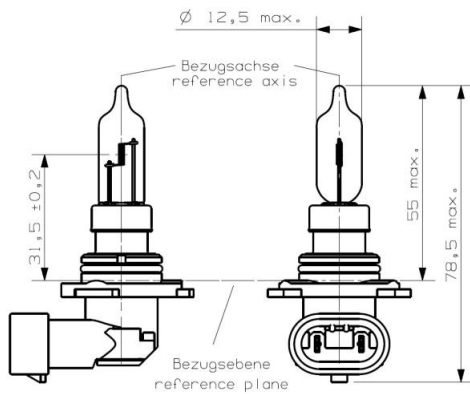


GENERAL

	HB3 SL+ 12V 60W P20d 9005 SL+ 12,8V 65W P20d Super Luminance+	Features	original equipment manufacturer quality, high luminance, bright white light, Infrared coating, yellow cover plate, hardglass, UV-cut, silver plated contact
	Ordering Number 27009	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	high beam, Bi-halogen function

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V DOT: 12,8V	
	Rated Wattage	max. 73W @ 13,2V max. 70W @ 12,8V	
Base	P20d	Operating Conditions	burning position: horizontal, long electrode above filament
Geometry	Light center length: 31,5mm ± 0,2mm Bulb diameter: max. 12,5mm	Luminous Flux	1860 lm ± 12% @ 13,2V 1700 lm ± 12% @ 12,8V
Lifetime	B3: 1400h @ 13,2V B3: 700h @ 14,0V B10: 1600h @ 13,2V B10: 800h @ 14,0V B50: 2000h @ 13,2V B50: 1000h @ 14,0V		

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 4/12/2017

replace for 23.07.2015-V3-PN14/0499

file 27009 - HB3 SL+ 12V 60W P20d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.