
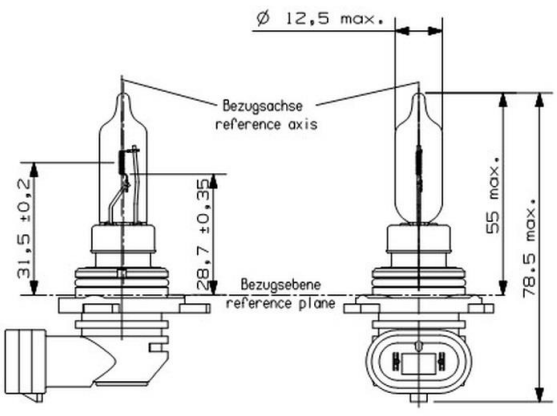


GENERAL

	HIR2 12V 55W PX22d 9012 12,8V 60W PX22d	Features	original equipment manufacturer quality, Infrared coating, yellow cover plate, hardglass, UV-cut, silver plated contact
	Ordering Number 28032	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam, Bi-halogen function

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V DOT: 12,8V	
	Rated Wattage	max. 63W @ 13,2V max. 60W @ 12,8V	
Base	PX22d	Operating Conditions	burning position: horizontal, long electrode above filament
Luminous Flux	1875 lm ± 15% @ 13,2V 1700 lm ± 15% @ 12,8V	Lifetime	B3: 500h @ 13,2V B3: 250h @ 14,0V B50: 700h @ 13,2V B50: 350h @ 14,0V Tc: 900h @ 13,2V Tc: 450h @ 14,0V
Geometry	Light center length: 28,7mm ± 0,35mm (ECE), 31,5mm ± 0,2mm (DOT) Bulb diameter: max. 12,5mm		

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 4/12/2017

replace for 17.06.2014-V3-PN14/0275

file 28032 - HIR2 12V 55W PX22d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.