
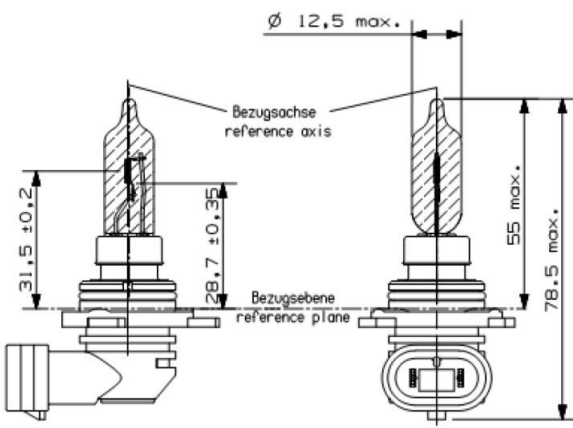


GENERAL

	HIR2 BLUE 12V 55W PX22d 9012 BLUE 12,8V 60W PX22d Blue Version	Features	original equipment manufacturer quality, bright white light, blue coating, color temperature up to 4000K, yellow cover plate, hardglass, UV-cut, silver plated contact
	Ordering Number 28632	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam, Bi-halogen function

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V DOT: 12,8V	
	Rated Wattage	max. 63W @13,2V max. 60W @12,8V	
Base	PX22d	Operating Conditions	burning position: horizontal, long electrode above filament
Luminous Flux	1875 lm ± 15% @13,2V 1700 lm ± 15% @12,8V	Lifetime	B3: 300h @13,2V B3: 150h @14,0V B10: 360h @13,2V B10: 180h @14,0V Tc: 500h @13,2V Tc: 250h @14,0V
Geometry	Light center length: 28,7mm ± 0,35mm (ECE), 31,5mm ± 0,2mm (DOT) Bulb diameter: max. 12,5mm		

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 4/12/2017

replace for 25.01.2017-V2-PN17/0023

file 28632 - HIR2 BLUE 12V 55W PX22d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.