
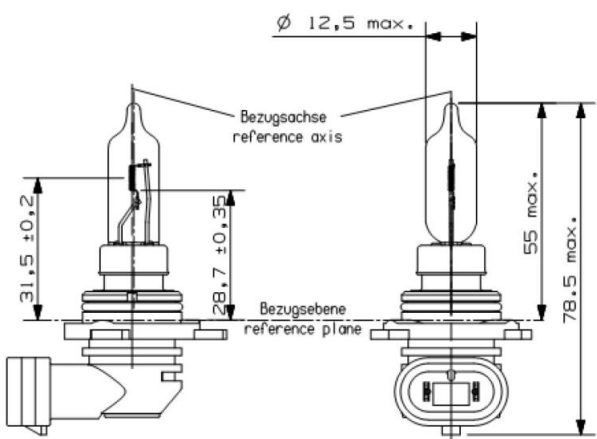


GENERAL

	HIR2 +30 12V 55W PX22d 9012 +30 12,8V 60W PX22d +30 More Light	Features	original equipment manufacturer quality, high luminance, Infrared coating, yellow cover plate, hardglass, UV-cut, silver plated contact
	Ordering Number 28432	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam, Bi-halogen function

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V DOT: 12,8V	
	Rated Wattage	max. 63W @ 13,2V max. 60W @ 12,8V	
Base	PX22d	Operating Conditions	burning position: horizontal, long electrode above filament
Luminous Flux	1875 lm ± 15% @ 13,2V 1700 lm ± 15% @ 12,8V	Lifetime	B3: 300h @ 13,2V B3: 150h @ 14,0V B10: 360h @ 13,2V B10: 180h @ 14,0V Tc: 500h @ 13,2V Tc: 250h @ 14,0V
Geometry	Light center length: 28,7mm ± 0,35mm (ECE), 31,5mm ± 0,2mm (DOT) Bulb diameter: max. 12,5mm		

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 4/12/2017

replace for 14.11.2014-V-PN14/0499

file 28432 - HIR2 +30 12V 55W PX22d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.