
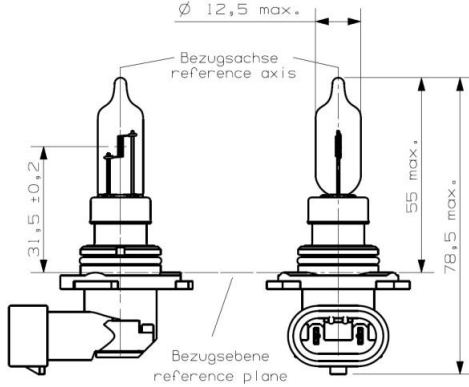


GENERAL			
	HB3 +120 12V 60W P20d 9005 +120 12,8V 65W P20d +120 More Light	<b>Features</b>	original equipment manufacturer quality, high luminance, bright white light, hardglass, UV-cut
	<b>Ordering Number</b> 27415	<b>Standard</b>	ECE R37 DOT
<b>Product Description</b>	halogen headlighting lamp	<b>Typical Applications</b>	high beam

TECHNICAL DETAILS			
	<b>Rated Voltage</b>	ECE R37: 12V DOT: 12,8V	
	<b>Rated Wattage</b>	max. 73W @ 13,2V max. 70W @ 12,8V	
<b>Base</b>	P20d		
<b>Operating Conditions</b>	burning position: horizontal, long electrode above filament		
<b>Luminous Flux</b>	1860 lm ± 12% @ 13,2V 1700 lm ± 12% @ 12,8V		
<b>Geometry</b>	Light center length: 31,5mm ± 0,2mm Bulb diameter: max. 12,5mm	<b>Lifetime</b>	B3: 150h @ 14,0V B50: 280h @ 14,0V Tc: 300h @ 14,0V

DELIVERY DETAILS		
<b>Packaging</b>	Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.