
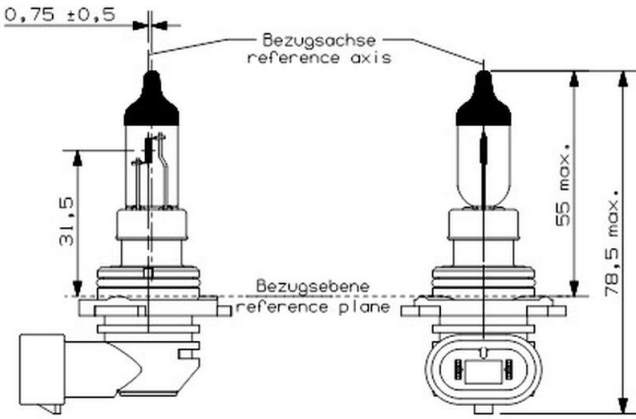


GENERAL

	HB4 +120 12V 51W P22d 9006 +120 12,8V 55W P22d +120 More Light	Features	original equipment manufacturer quality, high luminance, bright white light, silver top color, hardglass, UV-cut
	Ordering Number 27416	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V DOT: 12,8V	
	Rated Wattage	max. 62W @ 13,2V max. 60W @ 12,8V	
Base	P22d	Operating Conditions	burning position: horizontal, long electrode above filament
Luminous Flux	1095 lm ± 15% @ 13,2V 1000 lm ± 15% @ 12,8V	Lifetime	B3: 120h @ 14,0V B50: 270h @ 14,0V Tc: 300h @ 14,0V
Geometry	Light center length: 31,5mm ± 0,2mm Bulb diameter: max. 12,5mm		

DELIVERY DETAILS

Packaging	Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	--	---

valid from 01/02/2019

replace for 12/04/2017

file 27416 - HB4 +120 12V 51W P22d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.