
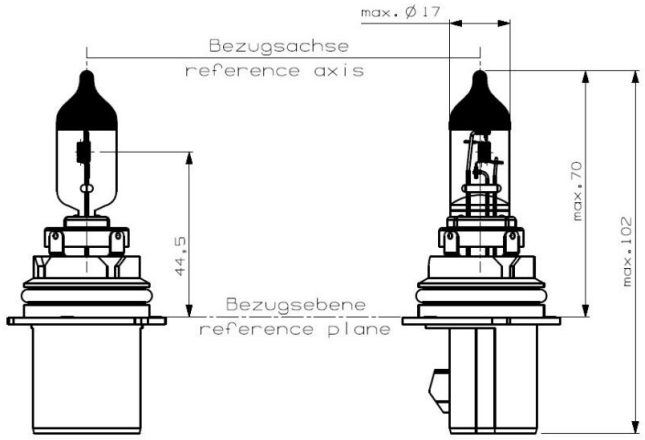


GENERAL			
	<b>HB5 +120</b> 9007 +120 12V 65W/55W PX29t +120 More Light	<b>Features</b>	original equipment manufacturer quality, high luminance, platinum top color, hardglass, UV-cut
	<b>Ordering Number</b> 27417	<b>Standard</b>	DOT
<b>Product Description</b>	halogen headlighting lamp	<b>Typical Applications</b>	low beam, high beam

TECHNICAL DETAILS					
	<b>Rated Voltage</b>	DOT: 12V	<b>Rated Wattage</b>	max. 70W/60W @12,8V	
	<b>Base</b>	PX29t	<b>Operating Conditions</b>	burning position: horizontal	
<b>Geometry</b>	Light center length: 44,5mm ± 0,25mm Bulb diameter: max. 17mm	<b>Luminous Flux</b>	1350/1000 lm ± 15% @12,8V	<b>Lifetime</b>	B3: 50/100h @14,0V B50: 100/200h @14,0V Tc: 150/300h @14,0V

DELIVERY DETAILS			
<b>Packaging</b>	Industrial Packaging: 200pcs. (8×25) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.	

valid from 12/04/2017

replace for 13.04.2016-V2-PN16/0118

file 27417 - 9007 +120 12V 65W/55W PX29t.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.