
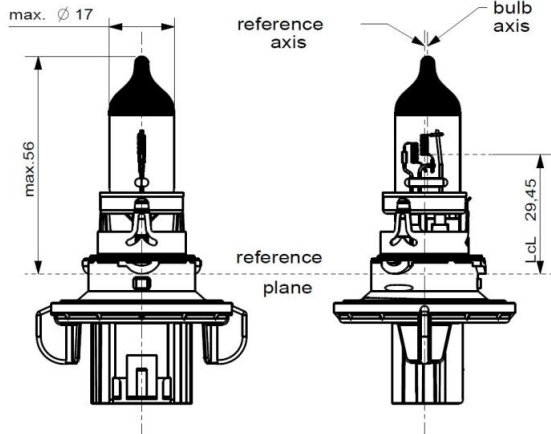


GENERAL			
	H13 +120 12V 60W/55W P26,4t 9008 +120 +120 More Light	Features	original equipment manufacturer quality, high luminance, platinum top color, hardglass, UV-cut
	Ordering Number 27418	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam

TECHNICAL DETAILS			
	Rated Voltage	ECE R37: 12V	
	Rated Wattage	max. 75W/68W @13,2V max. 70W/60W @12,8V	
Base	P26,4t		
Operating Conditions	burning position: horizontal		
Luminous Flux	1700/1100 lm ± 15% @13,2V 1500/1000 lm ± 15% @12,8V		
Geometry	Light center length: 29,45mm Bulb diameter: max. 17mm	Lifetime	B3: 50/100h @14,0V B50: 100/240h @14,0V Tc: 150/280h @14,0V

DELIVERY DETAILS		
Packaging	Industrial Packaging: 200pcs. (8×25) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 12/04/2017

replace for 13.04.2016-V2-PN16/0118

file 27418 - H13 +120 12V 60W/55W P26,4t.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.