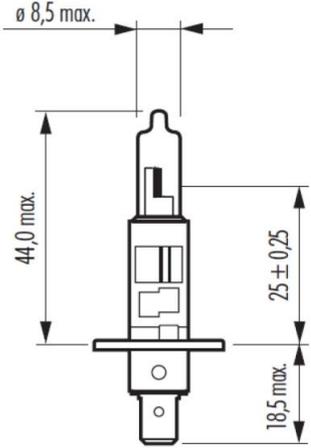


GENERAL			
	<b>H1 +100</b> 12V 55W P14,5s +100 More Light	<b>Features</b>	original equipment manufacturer quality, high luminance, quartzglass, UV-cut
	<b>Ordering Number</b> 27420	<b>Standard</b>	ECE R37 DOT
<b>Product Description</b>	halogen headlighting lamp	<b>Typical Applications</b>	low beam, high beam

TECHNICAL DETAILS			
	<b>Rated Voltage</b>	ECE R37: 12V	
	<b>Rated Wattage</b>	max. 68W @13,2V	
<b>Geometry</b> Light center length: 25mm ± 0,25mm Bulb diameter: max. 8,5mm	<b>Base</b>	P14,5s	
	<b>Operating Conditions</b>	burning position: horizontal, long electrode above filament	
<b>Lifetime</b>	<b>Luminous Flux</b>	1550 lm ± 15% @13,2V	
	B3: 110h @13,2V Tc: 220h @13,2V		

DELIVERY DETAILS		
<b>Packaging</b>	Industrial Packaging: 320pcs. (4×80) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.