
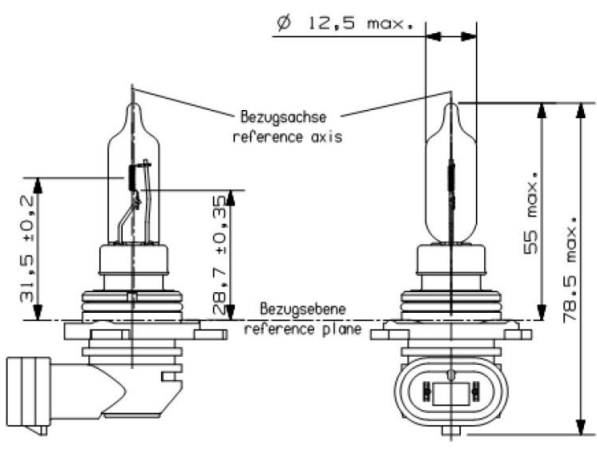


GENERAL

	HIR2 +120 12V 55W PX22d 9012 +120 12,8V 60W PX22d +120 More Light	Features	original equipment manufacturer quality, high luminance, Infrared coating, yellow cover plate, hardglass, UV-cut
	Ordering Number 27432	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam, Bi-halogen function

TECHNICAL DETAILS

 <p> $\varnothing 12,5 \text{ max.}$ Bezugsachse reference axis $31,5 \pm 0,2$ $38,7 \pm 0,35$ Bezugsebene reference plane 55 max. $78,5 \text{ max.}$ </p>	Rated Voltage	ECE R37: 12V DOT: 12,8V	
	Rated Wattage	max. 63W @13,2V max. 60W @12,8V	
Base	PX22d	Operating Conditions	burning position: horizontal, long electrode above filament
Geometry	Light center length: 28,7mm $\pm 0,35$ mm (ECE), 31,5mm $\pm 0,2$ mm (DOT) Bulb diameter: max. 12,5mm	Luminous Flux	1875 lm $\pm 15\%$ @13,2V 1700 lm $\pm 15\%$ @12,8V
Lifetime	B3: 150h @13,2V B3: 75h @14,0V B10: 200h @13,2V B10: 100h @14,0V Tc: 300h @13,2V Tc: 150h @14,0V		

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (5x40) Commercial Box Packaging: 100pcs. (10x10x1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 15.05.2018

replace for

file 27432 - HIR2 +120 12V 55W PX22d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.