
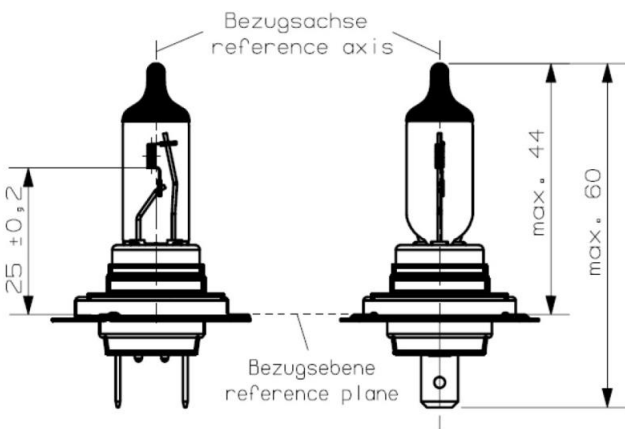


GENERAL			
	H7 +120 12V 55W PX26d +120 More Light	Features	original equipment manufacturer quality, high luminance, bright white light, silver top color, hardglass, UV-cut
	Ordering Number 27438	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam

TECHNICAL DETAILS			
		Rated Voltage	ECE R37: 12V
		Rated Wattage	max. 58W @13,2V
		Base	PX26d
		Operating Conditions	burning position: horizontal, long electrode above filament
		Luminous Flux	1500 lm ± 10% @13,2V
Geometry	Light center length: 25mm ± 0,2mm Bulb diameter: max. 12,5mm	Lifetime	B3: 200h @13,2V Tc: 400h @13,2V

DELIVERY DETAILS			
Packaging	Industrial Packaging: 180pcs. (4x45) Commercial Box Packaging: 100pcs. (10x10x1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.	