
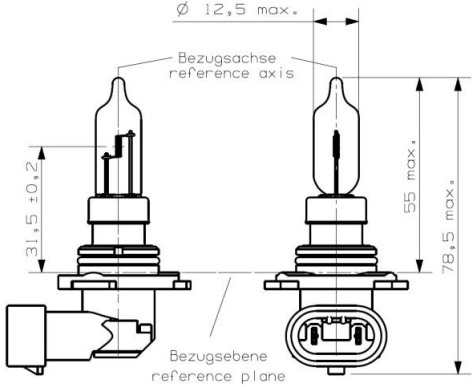


GENERAL			
	<b>HB3</b> 12V 60W P20d 9005 12,8V 65W P20d	<b>Features</b> original equipment manufacturer quality, hardglass, UV-cut	
	<b>Ordering Number</b> 28005		
<b>Product Description</b>	halogen headlighting lamp	<b>Typical Applications</b>	high beam

TECHNICAL DETAILS			
	<b>Rated Voltage</b>	ECE R37: 12V DOT: 12,8V	
	<b>Rated Wattage</b>	max. 73W @ 13,2V max. 70W @ 12,8V	
<b>Base</b>	P20d		
<b>Operating Conditions</b>	burning position: horizontal, long electrode above filament		
<b>Luminous Flux</b>	1860 lm ± 12% @ 13,2V 1700 lm ± 12% @ 12,8V		
<b>Geometry</b>	Light center length: 31,5mm ± 0,2mm Bulb diameter: max. 12,5mm	<b>Lifetime</b>	B3: 330h @ 13,2V B3: 170h @ 14,0V B50: 650h @ 13,2V B50: 330h @ 14,0V Tc: 700h @ 13,2V Tc: 370h @ 14,0V

DELIVERY DETAILS			
<b>Packaging</b>	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.	

valid from 08/08/2018

replace for 12/04/2017

file 28005 - HB3 12V 60W P20d.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.