
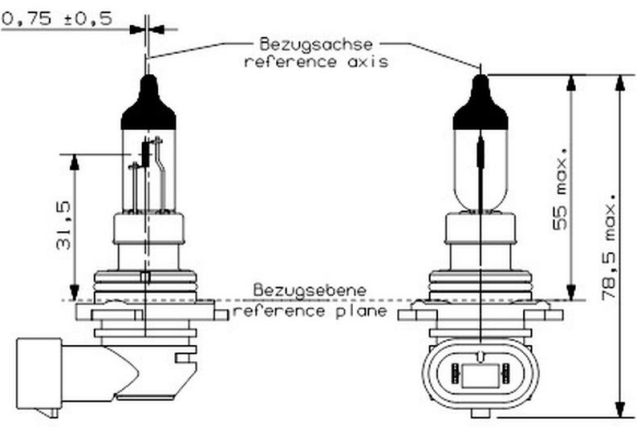


GENERAL

	HB4 12V 51W P22d 9006 12,8V 55W P22d	Features	original equipment manufacturer quality, black top color, hardglass, UV-cut
	Ordering Number 28006	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, fog light

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V DOT: 12,8V	
	Rated Wattage	max. 62W @ 13,2V max. 60W @ 12,8V	
Base	P22d	Operating Conditions	burning position: horizontal, long electrode above filament
Geometry	Light center length: 31,5mm Bulb diameter: max. 12,5mm	Luminous Flux	1095 lm ± 15% @ 13,2V 1000 lm ± 15% @ 12,8V
Lifetime	B3: 1000h @ 13,2V B3: 500h @ 14,0V B50: 2000h @ 13,2V B50: 1000h @ 14,0V Tc: 2400h @ 13,2V Tc: 1200h @ 14,0V		

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 12/04/2017

replace for 20.10.2015-V2-PN15/0441

file 28006 - HB4 12V 51W P22d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.