
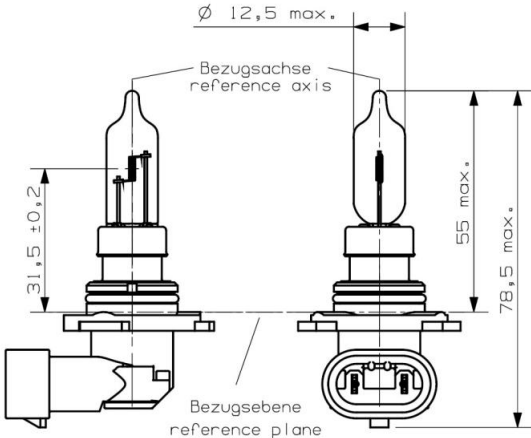


GENERAL			
	HB3 LLT 12V 60W P20d 9005 LLT 12,8V 65W P20d Long Lifetime	Features	original equipment manufacturer quality, hardglass, UV-cut
	Ordering Number 28009	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	high beam

TECHNICAL DETAILS			
	Rated Voltage	ECE R37: 12V DOT: 12,8V	
	Rated Wattage	max. 73W @ 13,2V max. 70W @ 12,8V	
Base	P20d		
Operating Conditions	burning position: horizontal, long electrode above filament		
Luminous Flux	1860 lm ± 12% @ 13,2V 1700 lm ± 12% @ 12,8V		
Geometry	Light center length: 31,5mm ± 0,2mm Bulb diameter: max. 12,5mm	Lifetime	B3: 800h @ 13,2V B3: 400h @ 14,0V B50: 1400h @ 13,2V B50: 700h @ 14,0V Tc: 1500h @ 13,2V Tc: 750h @ 14,0V

DELIVERY DETAILS		
Packaging	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.