
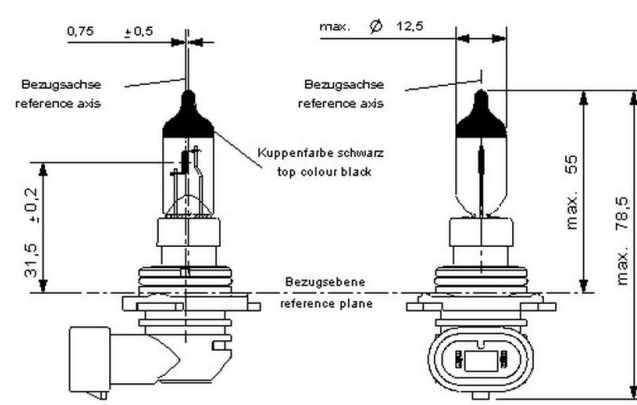


#### GENERAL

	<b>HB4 LLT</b> 12V 51W P22d 9006 LLT 12,8V 55W P22d Long Lifetime	<b>Features</b>	original equipment manufacturer quality, black top color, hardglass, UV-cut
	<b>Ordering Number</b> 28010	<b>Standard</b>	ECE R37 DOT
<b>Product Description</b>	halogen headlighting lamp	<b>Typical Applications</b>	low beam, fog light

#### TECHNICAL DETAILS

	<b>Rated Voltage</b>	ECE R37: 12V DOT: 12,8V	
	<b>Rated Wattage</b>	max. 62W @13,2V max. 60W @12,8V	
<b>Base</b>	P22d		
<b>Operating Conditions</b>	burning position: horizontal, long electrode above filament		
<b>Luminous Flux</b>	1095 lm ± 15% @13,2V 1000 lm ± 15% @12,8V		
<b>Geometry</b>	Light center length: 31,5mm ± 0,2mm Bulb diameter: max. 12,5mm	<b>Lifetime</b>	B3: 900h @14,0V B50: 1550h @14,0V Tc: 1650h @14,0V

#### DELIVERY DETAILS

<b>Packaging</b>	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 12/04/2017

replace for 20.02.2013-V1-PN12/0252

file 28010 - HB4 LLT 12V 51W P22d.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.