
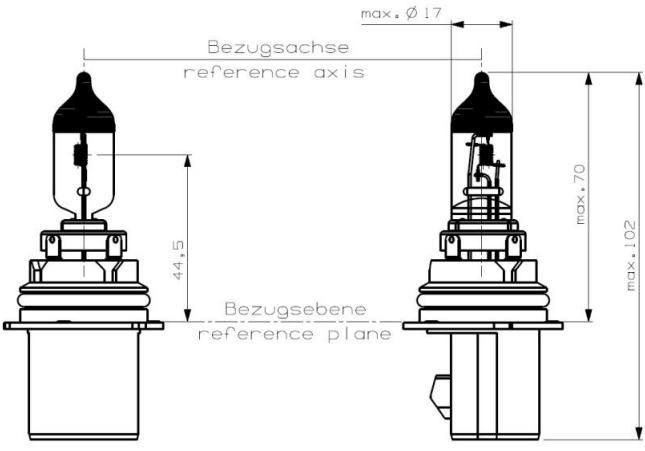


GENERAL			
	HB5 LLT 9007 LLT 12V 65W/55W PX29t Long Lifetime	Features	original equipment manufacturer quality, black top color, hardglass, UV-cut
	Ordering Number 28014	Standard	DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam

TECHNICAL DETAILS			
		Rated Voltage	DOT: 12V
		Rated Wattage	max. 70W/60W @12,8V
		Base	PX29t
		Operating Conditions	burning position: horizontal
		Luminous Flux	1350/1000 lm ± 15% @12,8V
Geometry	Light center length: 44,5mm Bulb diameter: max. 17mm	Lifetime	B3: 150/1000h @14,0V B50: 350/1800h @14,0V Tc: 400/2000h @14,0V

DELIVERY DETAILS		
Packaging	Industrial Packaging: 200pcs. (8×25) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.