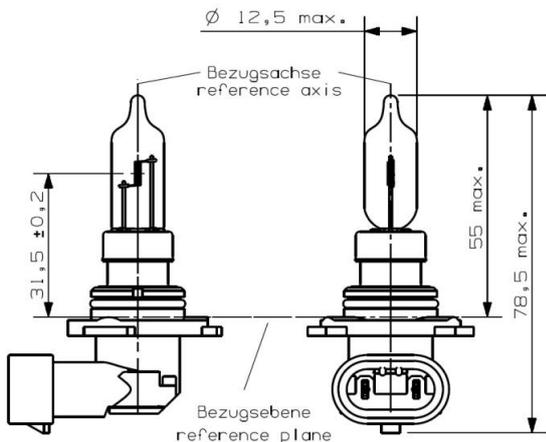


GENERAL

	Rally 12V 100W P20d	Features	hardglass
	Ordering Number 28025	Standard	not regulated
Product Description	halogen headlighting lamp	Typical Applications	high beam

TECHNICAL DETAILS

	Rated Voltage	12V
	Rated Wattage	100W @13,2V
Base	P20d	
Operating Conditions	burning position: horizontal, long electrode above filament	
Luminous Flux	2650 lm ± 12% @13,2V	
Geometry	Light center length: 31,5mm ± 0,2mm Bulb diameter: max. 12,5mm	
Lifetime	B3: 40h @14,0V B50: 80h @14,0V Tc: 100h @14,0V	

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only. Offroad only.
------------------	---------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------

valid from 12/04/2017

replace for 20.02.2013-V1-PN12/0252

file 28025 - Rally 12V 100W P20d.100

Disclaimer:
Subject to change without notice. Errors and omission accepted.
Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com