
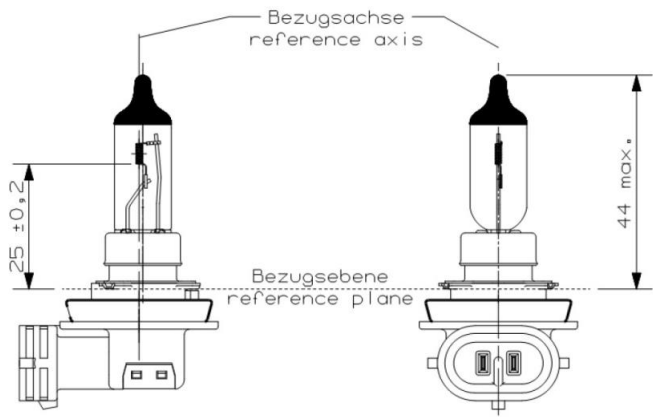


GENERAL			
	<b>H11</b> 12V 55W PGJ19-2	<b>Features</b>	original equipment manufacturer quality, black top color, green cover plate, hardglass, UV-cut
	<b>Ordering Number</b> 28078	<b>Standard</b>	ECE R37 DOT
<b>Product Description</b>	halogen headlighting lamp	<b>Typical Applications</b>	low beam, fog light

TECHNICAL DETAILS			
	<b>Rated Voltage</b>	ECE R37: 12V	
	<b>Rated Wattage</b>	max. 62W @13,2V max. 59W @12,8V	
<b>Base</b>	PGJ19-2		
<b>Operating Conditions</b>	burning position: horizontal, long electrode above filament		
<b>Luminous Flux</b>	1350 lm ± 10% @13,2V 1250 lm ± 150lm @12,8V		
<b>Geometry</b>	Light center length: 25mm ± 0,2mm Bulb diameter: max. 12,5mm	<b>Lifetime</b>	B3: 500h @13,2V Tc: 800h @13,2V

DELIVERY DETAILS		
<b>Packaging</b>	Industrial Packaging: 140pcs. (4×35) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 12/04/2017

replace for 06.07.2016-V4-PN16/0245

file 28078 - H11 12V 55W PGJ19-2.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.

**vosla GmbH Plauen Germany**  
[www.vosla.com](http://www.vosla.com)