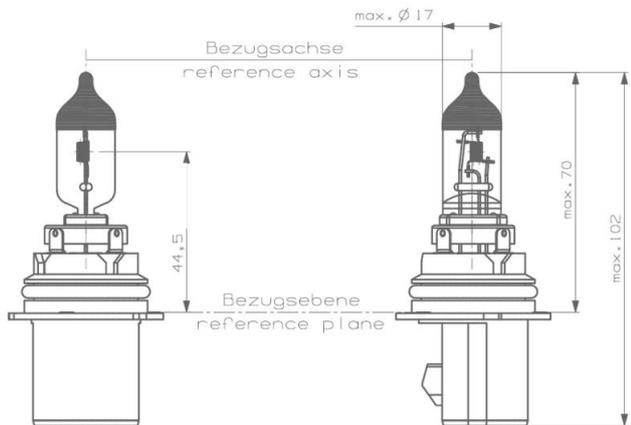


#### GENERAL

	<b>HB5 +50</b> 9007 +50 12V 65W/55W PX29t +50 More Light	<b>Features</b>	original equipment manufacturer quality, high luminance, black top color, hardglass, UV-cut
	<b>Ordering Number</b> 28087	<b>Standard</b>	DOT
<b>Product Description</b>	halogen headlighting lamp	<b>Typical Applications</b>	low beam, high beam

#### TECHNICAL DETAILS

	<b>Rated Voltage</b>	DOT: 12V	
	<b>Rated Wattage</b>	max. 70W/60W @12,8V	
<b>Base</b>	PX29t		
<b>Operating Conditions</b>	burning position: horizontal		
<b>Luminous Flux</b>	1350/1000 lm ± 15% @12,8V		
<b>Geometry</b>	Light center length: 44,5mm Bulb diameter: max. 17mm	<b>Lifetime</b>	B3: 110/220h @14,0V B50: 160/320h @14,0V Tc: 200/400h @14,0V

#### DELIVERY DETAILS

<b>Packaging</b>	Industrial Packaging: 200pcs. (8×25) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 12/04/2017

replace for 13.03.2014-V1-PN14/0146

file 28087 - 9007 +50 12V 65W/55W PX29t.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.

**vosla GmbH Plauen Germany**  
[www.vosla.com](http://www.vosla.com)