
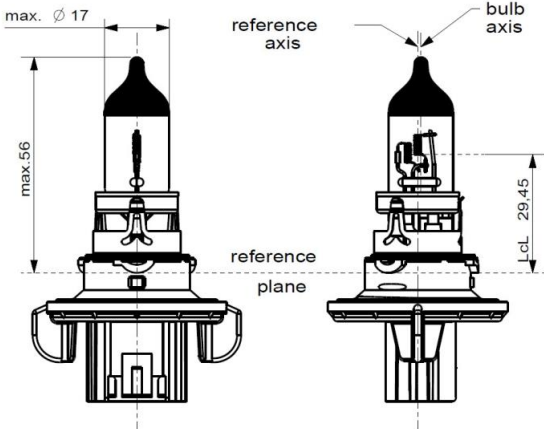


GENERAL			
	H13 +50 12V 60W/55W P26,4t 9008 +50  +50 More Light	<b>Features</b>  original equipment manufacturer quality, high luminance, black top color, hardglass, UV-cut	<b>Standard</b>  ECE R37 DOT
	<b>Ordering Number</b> 28089		
<b>Product Description</b>	halogen headlighting lamp	<b>Product Description</b>	halogen headlighting lamp

TECHNICAL DETAILS			
	<b>Rated Voltage</b>	ECE R37: 12V	<b>Rated Wattage</b>  max. 75W/68W @13,2V max. 70W/60W @12,8V
	<b>Rated Wattage</b>	max. 75W/68W @13,2V max. 70W/60W @12,8V	
<b>Geometry</b>  Light center length: 29,45mm Bulb diameter: max. 17mm	<b>Operating Conditions</b>	burning position: horizontal	<b>Luminous Flux</b>  1700/1100 lm ± 15% @13,2V 1500/1000 lm ± 15% @12,8V
	<b>Lifetime</b>	B10: 80/200h @14,0V B50: 160/400h @14,0V Tc: 180/450h @14,0V	

DELIVERY DETAILS			
<b>Packaging</b>	Industrial Packaging: 200pcs. (8×25) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.	

valid from 12/04/2017

replace for 19.02.2013-V1-PN12/0248

file 28089 - H13 +50 12V 60W/55W P26,4t.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.