
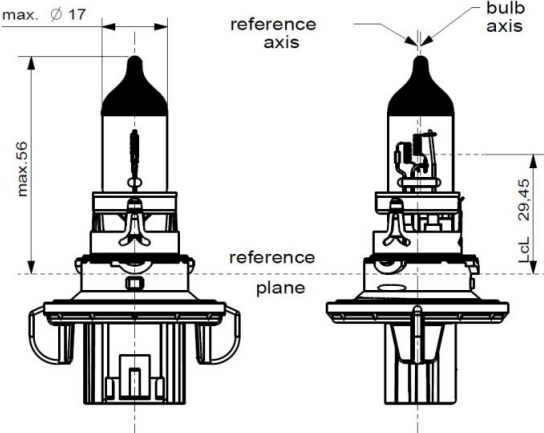


GENERAL			
	H13 12V 60W/55W P26,4t 9008	Features original equipment manufacturer quality, black top color, hardglass, UV-cut	
	Ordering Number 28092		
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam

TECHNICAL DETAILS			
	Geometry Light center length: 29,45mm Bulb diameter: max. 17mm	Rated Voltage	ECE R37: 12V
		Rated Wattage	max. 75W/68W @13,2V max. 70W/60W @12,8V
		Base	P26,4t
		Operating Conditions	burning position: horizontal
		Luminous Flux	1700/1100 lm ± 15% @13,2V 1500/1000 lm ± 15% @12,8V
		Lifetime	B10: 150/1200h @14,0V B50: 300/1500h @14,0V Tc: 320/1600h @14,0V

DELIVERY DETAILS		
Packaging	Industrial Packaging: 200pcs. (8×25) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 12/04/2017

replace for 19.02.2013-V1-PN12/0248

file 28092 - H13 12V 60W/55W P26,4t.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.