
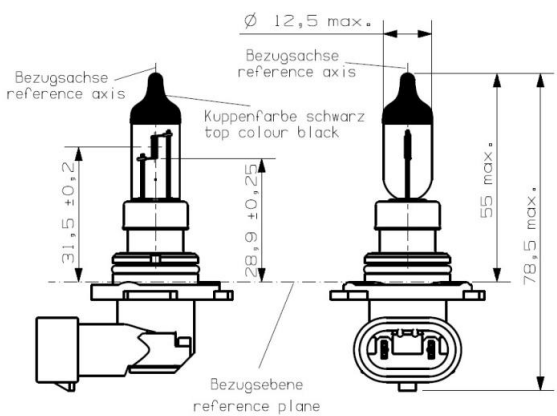


GENERAL

	H10 12V 42W PY20d 9145 12,8V 45W PY20d	Features original equipment manufacturer quality, hardglass, UV-cut
	Ordering Number 28095	
Product Description	halogen headlighting lamp	Typical Applications fog light

TECHNICAL DETAILS

	Rated Voltage ECE R37: 12V DOT: 12,8V
	Rated Wattage max. 50W @ 13,2V max. 48W @ 12,8V
Base PY20d	Operating Conditions burning position: horizontal, long electrode above filament
Geometry Light center length: 28,9mm ± 0,25mm (ECE), 31,5mm ± 0,2mm (DOT) Bulb diameter: max. 12,5mm	Luminous Flux 850 lm ± 15% @ 13,2V 1000 lm ± 12% @ 12,8V
Lifetime	B3: 1500h @ 13,2V B3: 850h @ 14,0V B50: 2400h @ 13,2V B50: 1400h @ 14,0V Tc: 2800h @ 13,2V Tc: 1600h @ 14,0V

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 12/04/2017

replace for 19.02.2013-V1-PN12/0252

file 28095 - H10 12V 42W PY20d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.