
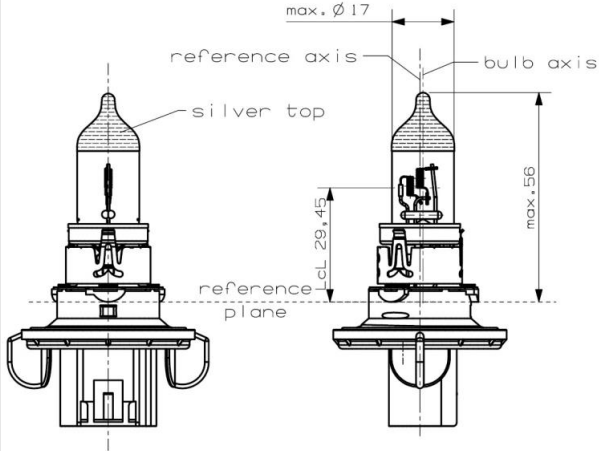


GENERAL			
	H13 +100 12V 60/55W P26,4t 9008 +100 +100 More Light	Features	original equipment manufacturer quality, high luminance, bright white light, silver top color, hardglass, UV-cut
	Ordering Number 28096	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam

TECHNICAL DETAILS			
	Rated Voltage	ECE R37: 12V DOT:	
	Rated Wattage	max. 75W/68W @13,2V max. 70W/60W @12,8V	
Base	P26,4t	Operating Conditions	burning position: horizontal
Geometry	Light center length: 29,45mm Bulb diameter: max. 17mm	Luminous Flux	1700/1100 lm ± 15% @13,2V 1500/1000 lm ± 15% @12,8V
Lifetime	B3: 50/100h @14,0V B50: 100/200h @14,0V Tc: 150/250h @14,0V		

DELIVERY DETAILS		
Packaging	Industrial Packaging: 200pcs. (8×25) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.