
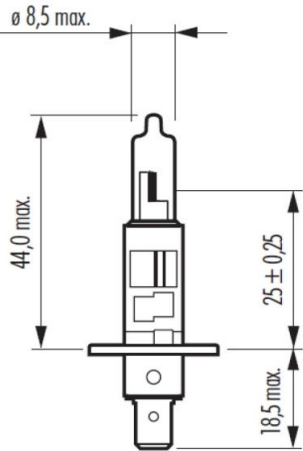


GENERAL			
	<b>H1</b> 12V 55W P14,5s	<b>Features</b>	original equipment manufacturer quality, quartzglass, UV-cut
	<b>Ordering Number</b> 28320	<b>Standard</b>	ECE R37 DOT
<b>Product Description</b>	halogen headlighting lamp	<b>Typical Applications</b>	low beam, high beam, fog light

TECHNICAL DETAILS				
	<b>Rated Voltage</b>	ECE R37: 12V	<b>Rated Wattage</b>	max. 68W @13,2V
	<b>Base</b>	P14,5s	<b>Operating Conditions</b>	burning position: horizontal, long electrode above filament
<b>Luminous Flux</b>	1550 lm ± 15% @13,2V	<b>Lifetime</b>	B3: 400h @13,2V Tc: 650h @13,2V	
<b>Geometry</b>	Light center length: 25mm ± 0,25mm Bulb diameter: max. 8,5mm			

DELIVERY DETAILS		
<b>Packaging</b>	Industrial Packaging: 320pcs. (4×80) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 12/04/2017

replace for 29.01.2014-V1-PN14/0054

file 28320 - H1 12V 55W P14,5s.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.