
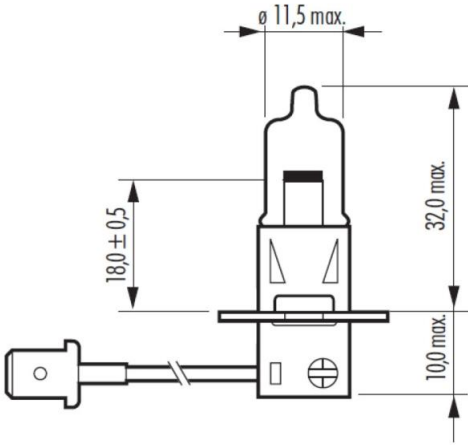


GENERAL			
	H3 12V 55W PK22s	Features	original equipment manufacturer quality, quartzglass, UV-cut
	Ordering Number 28321	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, fog light

TECHNICAL DETAILS			
	Rated Voltage	ECE R37: 12V	
	Rated Wattage	max. 68W @13,2V	
Base	PK22s		
Operating Conditions	burning position: horizontal		
Luminous Flux	1450 lm \pm 15% @13,2V		
Geometry	Light center length: 18mm \pm 0,5mm Bulb diameter: max. 11,5mm	Lifetime	B3: 400h @13,2V Tc: 650h @13,2V

DELIVERY DETAILS		
Packaging	Industrial Packaging: 245pcs. (5x49) Commercial Box Packaging: 100pcs. (10x10x1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 12/04/2017

replace for 29.01.2014-V1-PN14/0054

file 28321 - H3 12V 55W PK22s.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com