
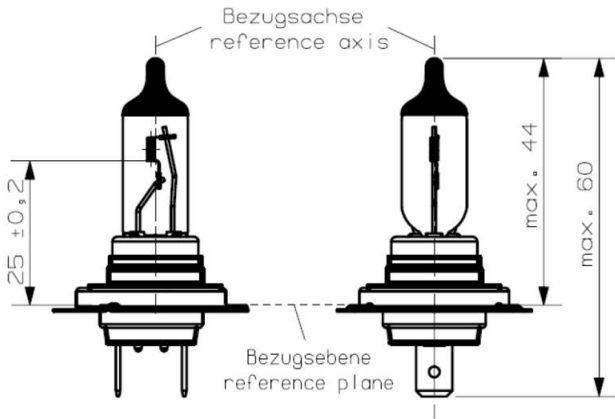


#### GENERAL

	<b>H7 LLT</b> 12V 55W PX26d Long Lifetime	<b>Features</b>	original equipment manufacturer quality, black top color, hardglass, UV-cut
	<b>Ordering Number</b> 28329	<b>Standard</b>	ECE R37 DOT
<b>Product Description</b>	halogen headlighting lamp	<b>Typical Applications</b>	low beam, high beam, fog light

#### TECHNICAL DETAILS

	<b>Rated Voltage</b>	ECE R37: 12V	
	<b>Rated Wattage</b>	max. 58W @13,2V	
<b>Base</b>	PX26d		
<b>Operating Conditions</b>	burning position: horizontal, long electrode above filament		
<b>Luminous Flux</b>	1500 lm ± 10% @13,2V		
<b>Geometry</b>	Light center length: 25mm ± 0,2mm Bulb diameter: max. 12,5mm	<b>Lifetime</b>	B3: 500h @13,2V Tc: 1000h @13,2V

#### DELIVERY DETAILS

<b>Packaging</b>	Industrial Packaging: 180pcs. (4×45) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 12/04/2017

replace for 19.02.2013-V1-PN12/0240

file 28329 - H7 LLT 12V 55W PX26d.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.