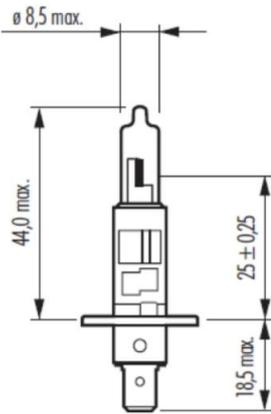


GENERAL			
	Rally 12V 100W P14,5s	Features	quartzglass
	Ordering Number 28350	Standard	not regulated
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam, fog light

TECHNICAL DETAILS			
	Rated Voltage	12V	
	Rated Wattage	100W @13,2V	
Geometry Light center length: 25mm ± 0,25mm Bulb diameter: max. 8,5mm	Base	P14,5s	
	Operating Conditions	burning position: horizontal, long electrode above filament	
	Luminous Flux	2600 lm ± 8% @13,2V	
	Lifetime	B3: 20h @13,2V Tc: 50h @13,2V	

DELIVERY DETAILS		
Packaging	Industrial Packaging: 320pcs. (4×80) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only. Offroad only.