
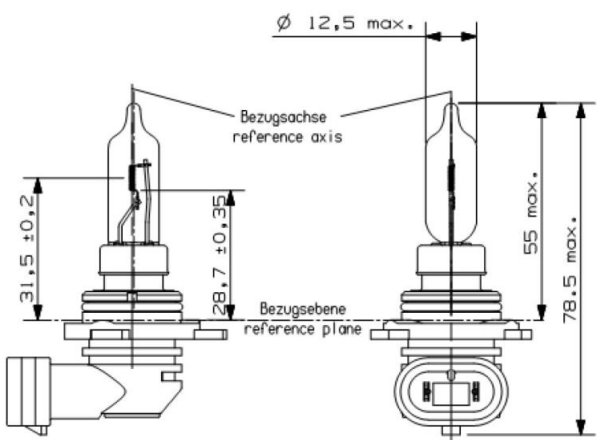


GENERAL			
	HIR2 +50 12V 55W PX22d 9012 +50 12.8V 60W PX22d +50 More Light	<b>Features</b>	original equipment manufacturer quality, high luminance, Infrared coating, yellow cover plate, hardglass, UV-cut
	<b>Ordering Number</b> 28433	<b>Standard</b>	ECE R37 DOT
<b>Product Description</b>	halogen headlighting lamp	<b>Typical Applications</b>	low beam, high beam, Bi-halogen function

TECHNICAL DETAILS			
	<b>Rated Voltage</b>	ECE R37: 12V DOT: 12.8V	
	<b>Rated Wattage</b>	max. 63W @ 13,2V max. 60W @ 12,8V	
<b>Base</b>	PX22d		
<b>Operating Conditions</b>	burning position: horizontal, long electrode above filament		
<b>Luminous Flux</b>	1875 lm ± 15% @ 13,2V 1700 lm ± 15% @ 12,8V		
<b>Geometry</b>	Light center length: 28,7mm ± 0,35mm (ECE), 31,5mm ± 0,2mm (DOT) Bulb diameter: max. 12,5mm	<b>Lifetime</b>	B3: 300h @ 13,2V B3: 150h @ 14,0V B10: 360h @ 13,2V B10: 180h @ 14,0V Tc: 500h @ 13,2V Tc: 250h @ 14,0V

DELIVERY DETAILS			
<b>Packaging</b>	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.	