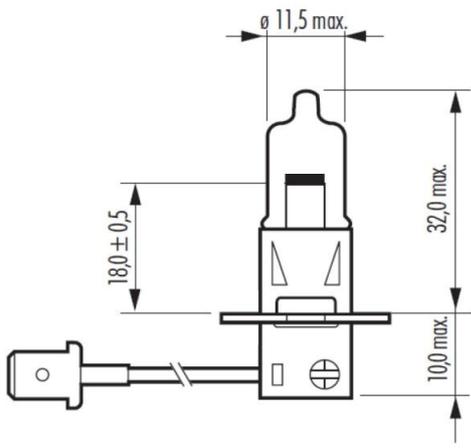


GENERAL			
	<b>H3</b> 24V 70W PK22s	<b>Features</b>	original equipment manufacturer quality, quartzglass, UV-cut
	<b>Ordering Number</b> 28700	<b>Standard</b>	ECE R37
<b>Product Description</b>	halogen headlighting lamp with double coil	<b>Typical Applications</b>	low beam, fog light

TECHNICAL DETAILS			
	<b>Rated Voltage</b>	ECE R37: 24V	
	<b>Rated Wattage</b>	max. 84W @28V	
<b>Base</b>	PK22s		
<b>Operating Conditions</b>	burning position: horizontal		
<b>Luminous Flux</b>	1750 lm $\pm$ 15% @28V		
<b>Geometry</b>	Light center length: 18mm $\pm$ 0,5mm Bulb diameter: max. 11,5mm	<b>Lifetime</b>	B3: 400h @28V Tc: 650h @28V

DELIVERY DETAILS		
<b>Packaging</b>	Industrial Packaging: 245pcs. (5x49) Commercial Box Packaging: 100pcs. (10x10x1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 12/04/2017

replace for 08.01.2016-V2-PN16/0016

file 28700 - H3 24V 70W PK22s.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.