
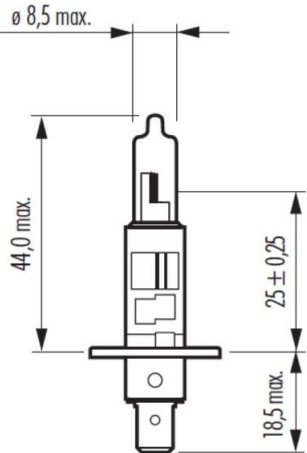


GENERAL			
	H1 24V 70W P14,5s	Features	original equipment manufacturer quality, quartzglass, UV-cut
	Ordering Number 28702	Standard	ECE R37
Product Description	halogen headlighting lamp with double coil	Typical Applications	low beam, high beam, fog light

TECHNICAL DETAILS			
	Rated Voltage	ECE R37: 24V	
	Rated Wattage	max. 84W @28V	
Geometry Light center length: 25mm ± 0,25mm Bulb diameter: max. 8,5mm	Base	P14,5s	
	Operating Conditions	burning position: horizontal, long electrode above filament	
	Luminous Flux	1900 lm ± 15% @28V	
Lifetime	B3: 400h @28V Tc: 650h @28V		

DELIVERY DETAILS		
Packaging	Industrial Packaging: 320pcs. (4×80) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 12/04/2017

replace for 08.01.2016-V2-PN16/0016

file 28702 - H1 24V 70W P14,5s.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.