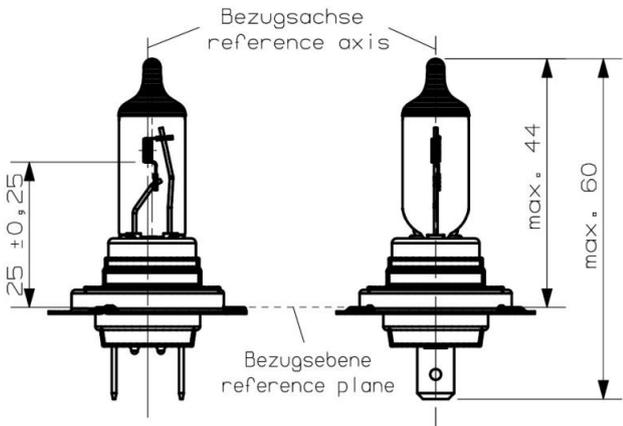


GENERAL			
	<b>H7 LLT</b> 24V 70W PX26d Long lifetime	<b>Features</b>	original equipment manufacturer quality, black top color, hardglass, UV-cut
	<b>Ordering Number</b> 28727	<b>Standard</b>	ECE R37
<b>Product Description</b>	halogen headlighting lamp with double coil	<b>Typical Applications</b>	low beam, high beam, fog light

TECHNICAL DETAILS			
		<b>Rated Voltage</b>	ECE R37: 24V
		<b>Rated Wattage</b>	max. 75W @28V
		<b>Base</b>	PX26d
		<b>Operating Conditions</b>	burning position: horizontal, long electrode above filament
		<b>Luminous Flux</b>	1750 lm ± 10% @28V
<b>Geometry</b>	Light center length: 25mm ± 0,25mm Bulb diameter: max. 12,5mm	<b>Lifetime</b>	B3: 500h @28V Tc: 1000h @28V

DELIVERY DETAILS			
<b>Packaging</b>	Industrial Packaging: 180pcs. (4×45) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.	

valid from 12/04/2017

replace for 29.01.2014-V4-PN14/0054

file 28727 - H7 LLT 24V 70W PX26d.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.

**vosla GmbH Plauen Germany**  
[www.vosla.com](http://www.vosla.com)