
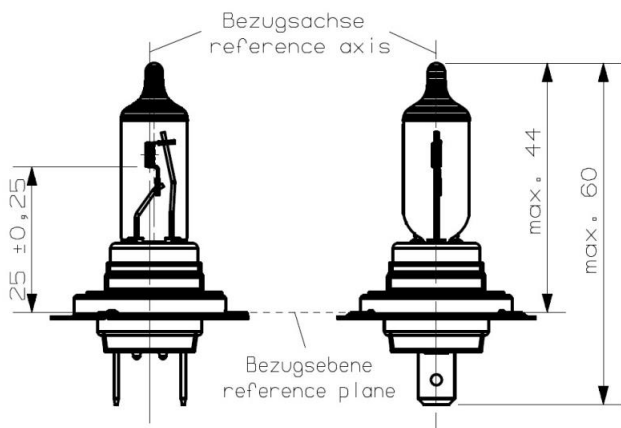


GENERAL			
	H7 24V 70W PX26d	Features	original equipment manufacturer quality, black top color, hardglass, UV-cut
	Ordering Number 28728	Standard	ECE R37
Product Description	halogen headlighting lamp with double coil	Typical Applications	low beam, high beam, fog light

TECHNICAL DETAILS			
	Rated Voltage	ECE R37: 24V	
	Rated Wattage	max. 75W @28V	
Base	PX26d		
Operating Conditions	burning position: horizontal, long electrode above filament		
Luminous Flux	1750 lm ± 10% @28V		
Geometry	Light center length: 25mm ± 0,25mm Bulb diameter: max. 12,5mm	Lifetime	B3: 220h @28V Tc: 500h @28V

DELIVERY DETAILS		
Packaging	Industrial Packaging: 180pcs. (4×45) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 12/04/2017

replace for 03.01.2014-V2-PN14/0003

file 28728 - H7 24V 70W PX26d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com