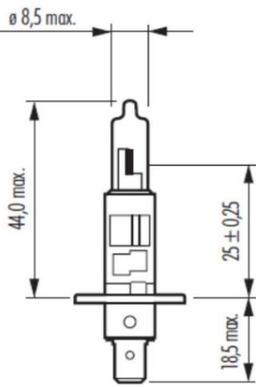


GENERAL

	Rally 24V 100W P14,5s	Features	quartzglass
	Ordering Number 28750	Standard	not regulated
Product Description	halogen headlighting lamp with double coil	Typical Applications	low beam, high beam, fog light

TECHNICAL DETAILS

	Rated Voltage	24V
	Rated Wattage	100W @28V
Geometry Light center length: 25mm ± 0,25mm Bulb diameter: max. 8,5mm	Base	P14,5s
	Operating Conditions	burning position: horizontal, long electrode above filament
	Luminous Flux	2600 lm ± 15% @28V
	Lifetime	B3: 50h @28V Tc: 200h @28V

DELIVERY DETAILS

Packaging	Industrial Packaging: 320pcs. (4×80) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only. Offroad only.
------------------	---	--