
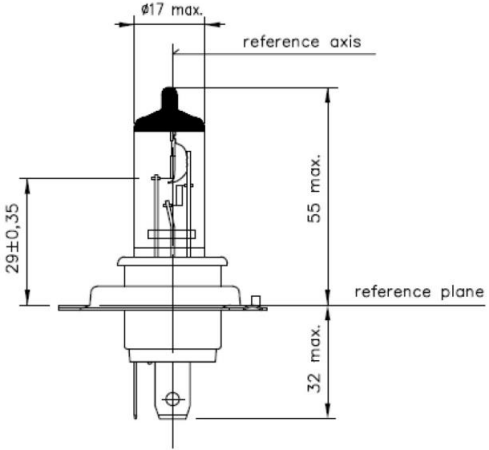


GENERAL

	H4 24V 75W/70W P43t	Features	original equipment manufacturer quality, black top color, hardglass, UV-cut
	Ordering Number 28892	Standard	ECE R37
Product Description	halogen headlighting lamp with double coil	Typical Applications	low beam, high beam

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 24V
	Rated Wattage	max. 85W/80W @28V
Geometry Light center length: 29mm ± 0,35mm Bulb diameter: max. 17mm	Base	P43t
	Operating Conditions	burning position: horizontal
	Luminous Flux	1900/1200 lm ± 15% @28V
Lifetime	B3: 170/350h @28V Tc: 400/800h @28V	

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 12/04/2017

replace for 08.01.2016-V3-PN16/0016

file 28892 - H4 24V 75W/70W P43t.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.