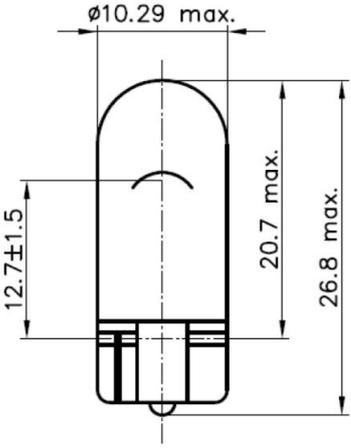


GENERAL			
	<b>W3W</b> 24V 3W W2,1x9,5d	<b>Features</b>	softglass
	<b>Ordering Number</b> 37109	<b>Standard</b>	ECE R37
<b>Product Description</b>	Incandescent signalling and interior lamp with single coil	<b>Typical Applications</b>	indicator, parking light, interior light

TECHNICAL DETAILS			
	<b>Rated Voltage</b>	ECE R37: 24V	
	<b>Rated Wattage</b>	max.4,6W @28V	
<b>Geometry</b> Light center length: 12,7mm ± 1,5mm Bulb diameter: max. 10,29mm	<b>Base</b>	W2,1x9,5d	
	<b>Operating Conditions</b>	burning position: horizontal	
	<b>Luminous Flux</b>	22 lm ± 30% @28V	
	<b>Lifetime</b>	B3: 500h @28V Tc: 1500h @28V	

DELIVERY DETAILS		
<b>Packaging</b>	Commercial Box Packaging: 200pcs. (20x10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.