
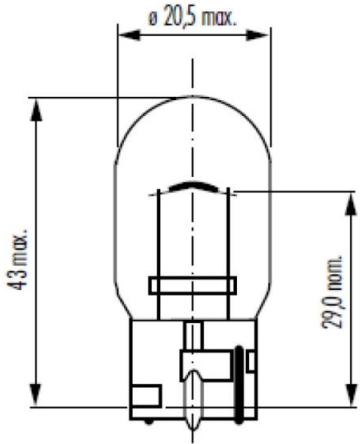


| GENERAL | | | |
|---|---------------------------------|-----------------------------|--------------------------|
|  | WY21W 12V 21W WX3x16d | Features | amber coating, softglass |
| | Ordering Number 37629 | Standard | ECE R37 |
| Product Description | Incandescent signalling lamp | Typical Applications | indicator |

| TECHNICAL DETAILS | | | |
|---|-----------------------------|------------------------------------|--|
|  | Rated Voltage | ECE R37: 12V | |
| | Rated Wattage | max. 26,5W @13,5V | |
| Geometry Light center length: 29mm Bulb diameter: max. 20,5mm | Base | WX3x16d | |
| | Operating Conditions | burning position: horizontal | |
| | Luminous Flux | 280 lm ± 20% @13,5V | |
| | Lifetime | B3: 120h @13,5V Tc: 320h @13,5V | |

| DELIVERY DETAILS | | |
|------------------|--|---|
| Packaging | Commercial Box Packaging: 200pcs. (20×10) | Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only. |