
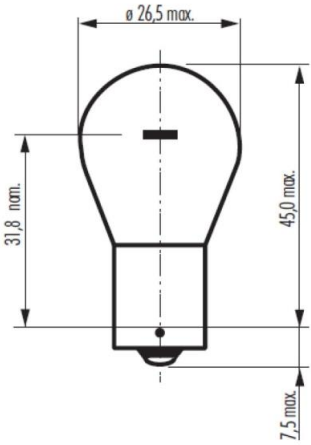


GENERAL			
	PY21W 12V 21W BAU15s	Features	amber coating, softglass
	Ordering Number 37638	Standard	ECE R37
Product Description	Incandescent signalling lamp	Typical Applications	indicator

TECHNICAL DETAILS			
	Rated Voltage	ECE R37: 12V	
	Rated Wattage	max. 26,5W @13,5V	
Geometry Light center length: 31,8mm Bulb diameter: max. 26,5mm	Base	BAU15s	
	Operating Conditions	burning position: horizontal	
	Luminous Flux	280 lm ± 20% @13,5V	
	Lifetime	B3: 900h @13,5V Tc: 1600h @13,5V	

DELIVERY DETAILS		
Packaging	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.