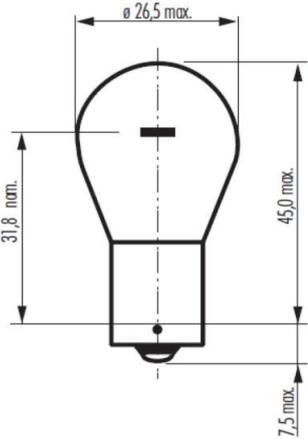


GENERAL			
	PY21W 24V 21W BAU15s	Features	amber coating, softglass
	Ordering Number 37645	Standard	ECE R37
Product Description	Incandescent signalling lamp with double coil	Typical Applications	indicator

TECHNICAL DETAILS			
	Rated Voltage	ECE R37: 24V	
	Rated Wattage	max. 29,7W @28V	
Geometry	Light center length: 31,8mm Bulb diameter: max. 26,5mm	Base	BAU15s
Operating Conditions	burning position: horizontal		
Luminous Flux	280 lm ± 20% @28V		
Lifetime	B3: 900h @28V Tc: 1600h @28V		

DELIVERY DETAILS		
Packaging	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.