
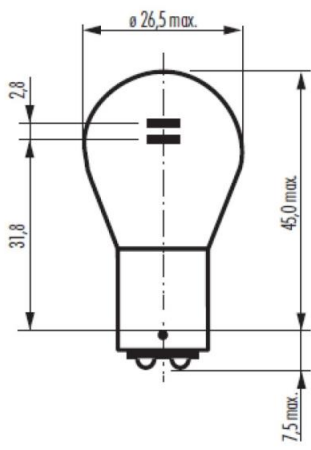


GENERAL

	P21/4W 12V 21W/4W BAZ15d	Features	softglass
	Ordering Number 37881	Standard	ECE R37
Product Description	Incandescent signalling lamp	Typical Applications	combined indicator and rear light, combined stop and rear light

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V
	Rated Wattage	max. 26,5W/5,5W @13,5V
Geometry Light center length: 31,8mm Bulb diameter: max. 26,5mm	Base	BAZ15d
	Operating Conditions	burning position: horizontal
	Luminous Flux	440 lm ±15% / 15 lm ± 20% @13,5V
Lifetime	B3: 250/600h @13,5V Tc: 480/2000h @13,5V	

DELIVERY DETAILS

Packaging	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	--	---

valid from 14.08.2017

replace for 27.11.2015-V1-PN15/0506

file 37881 - P21/4W 12V 21W/4W BAZ15d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.