
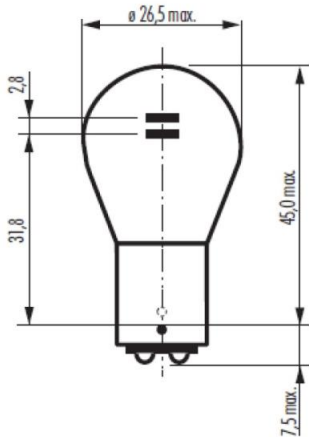


GENERAL

	P21/5W 24V 21W/5W BAY15d	Features	softglass
	Ordering Number 37925	Standard	ECE R37
Product Description	Incandescent signalling lamp with double coil	Typical Applications	combined indicator and rear light, combined stop and rear light

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 24V
	Rated Wattage	max. 29,7W/11W @28V
Geometry Light center length: 31,8mm Bulb diameter: max. 26,5mm	Base	BAY15d
	Operating Conditions	burning position: horizontal
	Luminous Flux	440 lm ± 15% / 40 lm ±20% @28V
	Lifetime	B3: 350/1000h @28V Tc: 750/2000h @28V

DELIVERY DETAILS

Packaging	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	----------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------

valid from 12/04/2017

replace for 14.08.2015-V2-PN14/0499

file 37925 - P21/5W 24V 21W/5W BAY15d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.