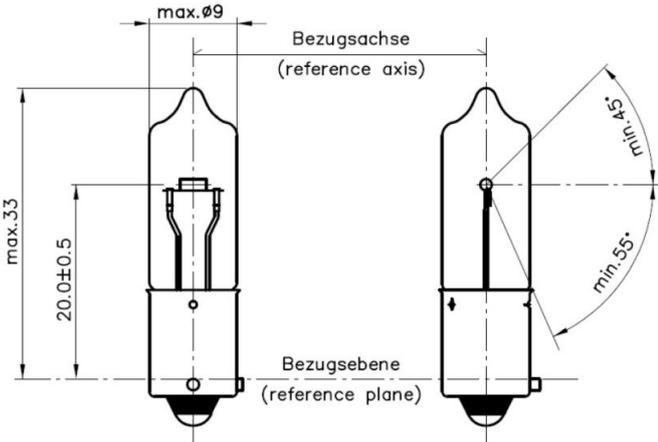


| GENERAL   |  |                             |   |
|---|--|-----------------------------|---|
|  | <b>H21W</b><br><b>24V 21W BAY9s</b>      | <b>Features</b>             | original equipment manufacturer quality, lead free soldered bottom contact, hardglass, UV-cut |
|   | <b>Ordering Number</b><br>38196          | <b>Standard</b>             | ECE R37   |
| <b>Product Description</b>  | halogen signalling lamp with double coil | <b>Typical Applications</b> | indicator, rear fog light, reversing light  |

| TECHNICAL DETAILS   |  |                             |                                       |
|---|--|-----------------------------|---------------------------------------|
|  |  | <b>Rated Voltage</b>        | ECE R37: 24V                          |
|   |  | <b>Rated Wattage</b>        | max. 29,4W @28V                       |
|   |  | <b>Base</b>                 | BAY9s                                 |
|   |  | <b>Operating Conditions</b> | bottom contact temperature max. 200°C |
|   |  | <b>Luminous Flux</b>        | 600 lm ± 15% @28V                     |
| <b>Geometry</b>   | Light center length:<br>20mm ± 0,5mm<br>Bulb diameter:<br>max. 9mm | <b>Lifetime</b>             | B3: 200h @28V<br>Tc: 400h @28V        |

| DELIVERY DETAILS |   |   |
|------------------|---|---|
| <b>Packaging</b> | Industrial Packaging:<br>1000pcs. (5×200)<br>Commercial Box Packaging:<br>200pcs. (20×10) | Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture.<br>For use in closed luminaires only. |