
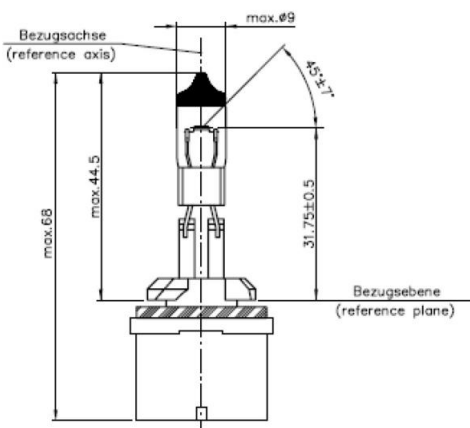


GENERAL			
	880 12,8V 27W PG13	Features	original equipment manufacturer quality, black top color, hardglass
	Ordering Number 28039	Standard	ANSI
Product Description	halogen headlighting lamp	Typical Applications	fog light, special light

TECHNICAL DETAILS			
	Rated Voltage	12,8V	
	Rated Wattage	max. 30W @12,8V	
Base	PG13		
Operating Conditions	burning position: horizontal		
Luminous Flux	540 lm ± 12% @12,8V without black top		
Geometry	Light center length: 31,75mm ± 0,5mm Bulb diameter: max. 9mm	Lifetime	B50: 300h @14,0V Lumen Maintenance: min. 85% after 225h @12,8V

DELIVERY DETAILS		
Packaging	Industrial Packaging: 300pcs. (5×60) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 12/04/2017

replace for 20.02.2013-V1-PN12/0263

file 28039 - 880 12,8V 27W PG13.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com