
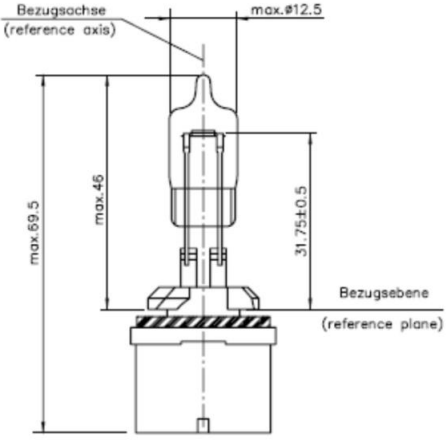


GENERAL			
	885 12,8V 50W PG13	Features	original equipment manufacturer quality, quartzglass
	Ordering Number 28055	Standard	ANSI
Product Description	halogen headlighting lamp	Typical Applications	fog light, special light

TECHNICAL DETAILS			
	Rated Voltage	12,8V	
	Rated Wattage	max. 56W @12,8V	
Base	PG13		
Operating Conditions	burning position: horizontal		
Luminous Flux	1250 lm ± 12% @12,8V		
Geometry	Light center length: 31,75mm ± 0,5mm Bulb diameter: max. 12,5mm	Lifetime	B50: 200h @14,0V Lumen Maintenance: min. 85% after 150h @12,8V

DELIVERY DETAILS		
Packaging	Industrial Packaging: 300pcs. (5×60) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 12/04/2017

replace for 03.11.2016-V2-PN16/0365

file 28055 - 885 12,8V 50W PG13.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.