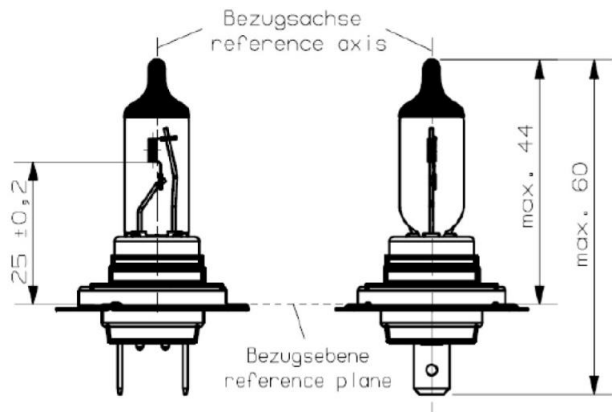


GENERAL

	H18 12V 65W PY26d-1	Features	original equipment manufacturer quality, silver top color, hardglass, UV-cut
	Ordering Number 28075	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V
	Rated Wattage	max. 69W @13,2V
Geometry	Base	PY26d-1
	Operating Conditions	burning position: horizontal, long electrode above filament
Luminous Flux	Luminous Flux	1700 lm ± 8% @13,2V
	Lifetime	B3: 800h @13,2V B3: 450h @14,0V B10: 920h @13,2V B10: 520h @14,0V Tc: 1200h @13,2V Tc: 700h @14,0V

DELIVERY DETAILS

Packaging	Industrial Packaging: 180pcs. (4×45) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 12/04/2017

replace for 15.10.2015-V1-PN15/0436

file 28075 - H18 12V 65W PY26d-1.100

Disclaimer:
Subject to change without notice. Errors and omission accepted.
Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com