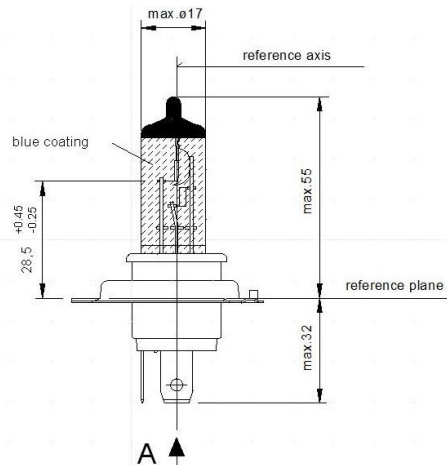


GENERAL

	HS1 12V 35W/35W PX43t	Features	black top color, hardglass, UV-cut
	Ordering Number 28220	Standard	ECE R37
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V
	Rated Wattage	35/35W ± 5% @13,2V
	Base	PX43t
	Operating Conditions	light-up position: horizontal, long electrode above filament
	Luminous Flux	825/525 lm ± 15% @13,2V
Geometry	Light center length: 28,5mm +0,45mm/-0,25mm Bulb diameter: max. 17mm	
	Lifetime	B3: 150/150h @13,2V Tc: 300/300h @13,2V

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 22.09.2023 PN23/0186

replace for 12.04.2017

file 28220 - HS1 12V 35W/35W PX43t.100

Disclaimer:
Subject to change without notice. Errors and omission accepted.
Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com