
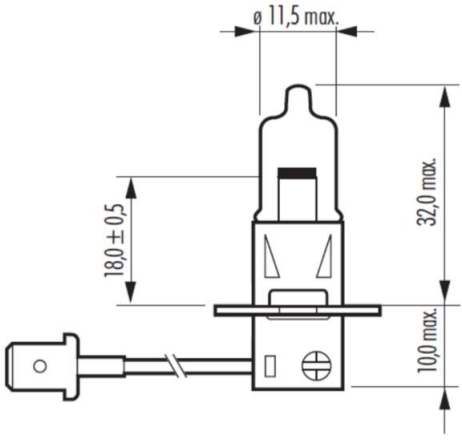


GENERAL			
	H3 LLT 24V 70W PK22s Long Lifetime	Features	original equipment manufacturer quality, quartzglass, UV-cut
	Ordering Number 28709	Standard	ECE R37
Product Description	halogen headlighting lamp with single coil	Typical Applications	low beam, fog light

TECHNICAL DETAILS			
	Rated Voltage	ECE R37: 24V	
	Rated Wattage	max. 84W @28V	
Geometry Light center length: 18mm ± 0,5mm Bulb diameter: max. 11,5mm	Base	PK22s	
	Operating Conditions	burning position: horizontal	
Lifetime B3: 600h @28V Tc: 1200h @28V	Luminous Flux	1750 lm ± 15% @28V	

DELIVERY DETAILS	
Packaging	Industrial Packaging: 245pcs. (5×49) Commercial Box Packaging: 100pcs. (10×10×1)
Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.	

valid from 12/04/2017

replace for 14.11.2014-V-PN14/0499

file 28709 - H3 LLT 24V 70W PK22s.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.