
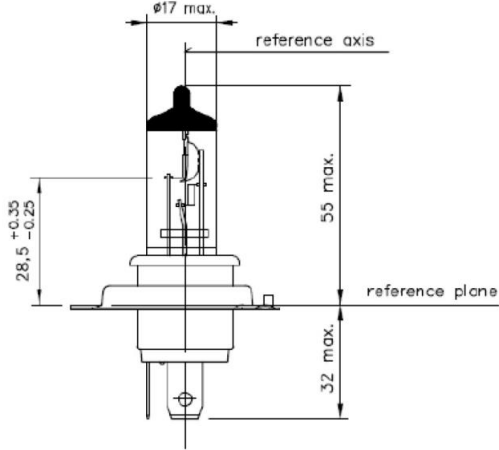


GENERAL

	H4 SHP LLT 24V 75W/70W P43t Shock Proof, Long Lifetime	Features	original equipment manufacturer quality, black top color, hardglass, UV-cut, support wire
	Ordering Number 28898	Standard	ECE R37
Product Description	halogen headlighting lamp with single coil	Typical Applications	low beam, high beam

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 24V	
	Rated Wattage	max. 85W/80W @13,2V	
Base	P43t	Operating Conditions	burning position: horizontal
Geometry	Light center length: 28,5mm +0,35mm/-0,25mm Bulb diameter: max. 17mm	Luminous Flux	1900/1200 lm \pm 15% @13,2V
Lifetime	B3: 140/450h @28V Tc: 300/1000h @28V		

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (5x40) Commercial Box Packaging: 100pcs. (10x10x1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 12/04/2017

replace for 14.11.2014-V-PN14/0499

file 28898 - H4 SHP LLT 24V 75W/70W P43t.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.