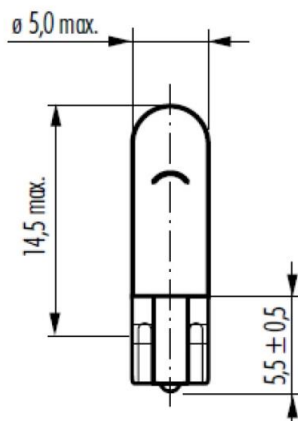


GENERAL

	W1,2W 12V 1,2W W2x4,6d	Features	softglass
	Ordering Number 37037	Standard	not regulated
Product Description	Incandescent signalling and interior lamp	Typical Applications	indicator, dashboard

TECHNICAL DETAILS

		<table><tr><td>Rated Voltage</td><td>12V</td></tr><tr><td>Rated Wattage</td><td>1,2W @13,5V</td></tr><tr><td>Base</td><td>W2x4,6d</td></tr><tr><td>Operating Conditions</td><td>burning position: horizontal</td></tr><tr><td>Luminous Flux</td><td>7,5 lm ± 15% @13,5V</td></tr><tr><td>Lifetime</td><td>B3: 500h @13,5V B50: 1000h @13,5V</td></tr></table>		Rated Voltage	12V	Rated Wattage	1,2W @13,5V	Base	W2x4,6d	Operating Conditions	burning position: horizontal	Luminous Flux	7,5 lm ± 15% @13,5V	Lifetime	B3: 500h @13,5V B50: 1000h @13,5V
Rated Voltage	12V														
Rated Wattage	1,2W @13,5V														
Base	W2x4,6d														
Operating Conditions	burning position: horizontal														
Luminous Flux	7,5 lm ± 15% @13,5V														
Lifetime	B3: 500h @13,5V B50: 1000h @13,5V														
Geometry	Bulb diameter: max. 5mm														

DELIVERY DETAILS

Packaging	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	--	---

valid from 12/04/2017

replace for 14.11.2014-V-PN14/0499

file 37037 - W1,2W 12V 1,2W W2x4,6d.100

Disclaimer:
Subject to change without notice. Errors and omission accepted.
Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com