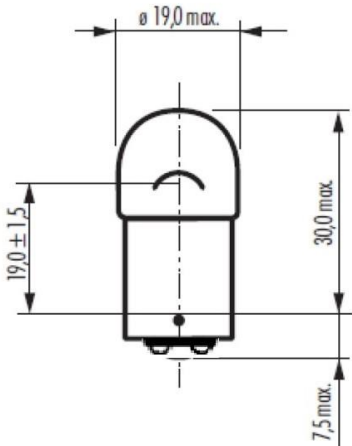


GENERAL

	R5W 12V 5W BA15d	Features	softglass
	Ordering Number 37172	Standard	ECE R37
Product Description	Incandescent signalling lamp	Typical Applications	rear light, parking light

TECHNICAL DETAILS

		Rated Voltage	ECE R37: 12V
		Rated Wattage	max. 5,5W @13,5V
Geometry Light center length: 19mm ± 1,5mm Bulb diameter: max. 19mm		Base	BA15d
		Operating Conditions	light-up position: horizontal
		Luminous Flux	50 lm ± 20% @13,5V
		Lifetime	B3: 150h @13,5V Tc: 400h @13,5V

DELIVERY DETAILS

Packaging	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	--	---

valid from 01.09.2023 PN23/0157

replace for 13.11.2018

file 37172 - R5W 12V 5W BA15d.100

Disclaimer:
Subject to change without notice. Errors and omission accepted.
Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com